Full-Size Bed Twin Bunk Full-Twin Bunk

FEATURES ON OUR NEW RV BEDS


- Designed with springs to support mattress versus plywood for better comfort
- Folds up against the wall for maximum storage space
- Includes ladder and safety rails as required by the Consumer Product Safety Commission
- Totally removable
- Safety tested to support 1000 pounds per bed
- Ladder can be rotated from right to left (universal position)
- · Easy one hand operation
- Adult can sit on bottom bunk with plenty of head clearance



PO Box 1667 · Ft. Smith, AR 72901 · 800 643 2102 JSI Corporation • Elkhari, IN • 547 262 2399
vvvv. recreational vehicle products.com
www.hickorysprings.com

HICKORY SPRINGS RV BEDS




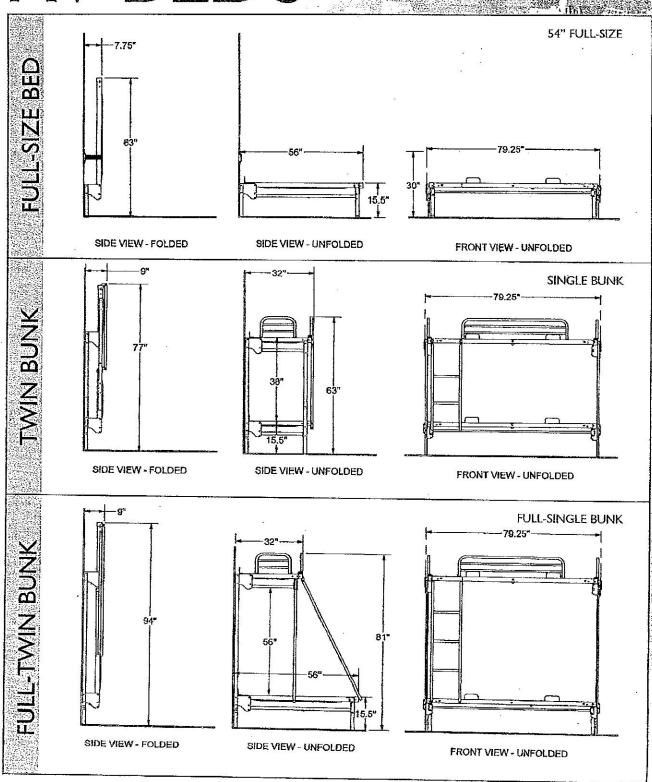


ASSEMBLY AND OPERATING INSTRUCTIONS

Models: 282876B

282872B





SAFETY WARNINGS

Patent Pending

This wall mounted foldable bunk bed is designed to give many years of comfortable and safe use by following these simple instructions:

 Wall blocking for screw attachment is required and should be at least 1 1/2 (38 mm) inches thick hardwood securely fastened to at least two wall studs on each side within or on the surface of the wall. See page 2 for locations.

It is recommended that two people perform the assembly of this bed.

Optional wall brackets are provided that allow the bed to be removed from the wall. Those beds must be removed while they are in the stored and secured position. Any disassembly must be done with the beds folded flat. This will ensure that the lifting springs are in a position that eliminates potential for injury.

Only adults should raise and lower the beds.

Keep hands and fingers away from all moving parts while raising and lowering.

- Never raise the bed to the stored position with someone in it as this could cause serious injury or death.
- Always secure the beds with the tie-down straps when in the stored position to prevent accidental lowering.

Follow the information on the warning label appearing on the upper bunk end and on the carton. Do not remove warning label from bed.

Always use the recommended size mattress or mattress support, or both, to help prevent the likelihood of entrapment or falls.

Surface of mattress must be at least 5 in. (127mm) below the upper edge of guardrails.

Do not allow children under 6 years of age to use the upper bunk.

Periodically check and ensure that the guardrails, ladder, and other components are in their proper position, free from damage, and that all connectors are tight.

Do not allow horseplay on or under the bed and prohibit jumping on the bed.

Always use the ladder for entering and leaving the upper bunk.

- Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
- Use of a night light may provide added safety precaution for a child using the upper bunk.

Always use guardrails on the upper bunk.

The use of water or sleep flotation mattresses is prohibited.

STRANGULATION HAZARD - Never attach or hang items to any part of the bunk bed that are not designed for use with the bed; for example, but not limited to, hooks, belts and jump ropes.

** Keep these instructions for future reference. **

OPERATION

TO LOWER THE BEDS TO THE FLOOR: First release the tie-down straps on each side. Then while supporting the bed frame with one hand, grasp the cross tube at the center with the other hand and pull to release, then gently lower the beds to the floor and unfold the safety rails.


TO RAISE THE BEDS TO THE STORED POSITION: First lift the top bunk mattress and fold down the safety rails. Grasp the front rail of the lower bunk and lift slowly until the beds are flat against the wall. Now secure the tie-down straps around the legs.

(1)

REQUIRED TOOLS FOR ASSEMBLY



7/16 COMBINATION WRENCH




#3 SQUARE DRIVE SCREWDRIVER


INCLUDED HARDWARE


0 0 0	OPTIONAL WALL MOUNTING BRACKET PT#3139RV241600PB	4
	1/4-20 X 5/8 <u>HEX HEAD BOLT</u> PT#3139184190B	12
	1/4-20 LOCK-NUT PT#3139184102B	30


	1/4-20 X 5/8 <u>SQ. DRIVE SCREW</u> PT#3139RV184131B	14
[1/4-20 X 1 1/4 <u>SQ. DRIVE SCREW</u> PT#3139RV184132B	16
	#12 X 1 1/4 SHEET METAL SCREW PT#3139RV184134B	24

SCREW LOCATIONS FOR WALL BLOCKING

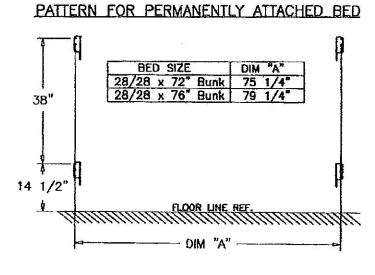




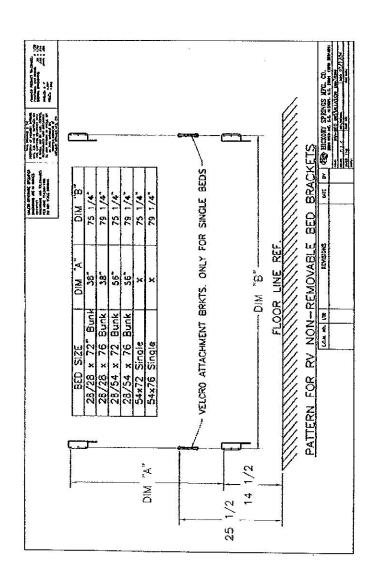

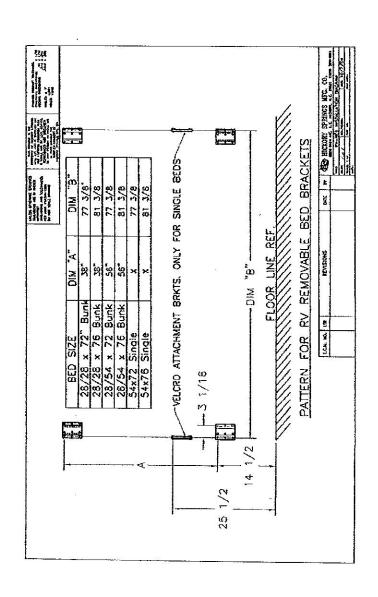


NOTE: THE BOTTOM BUNK HAS THE CROSS TUBE

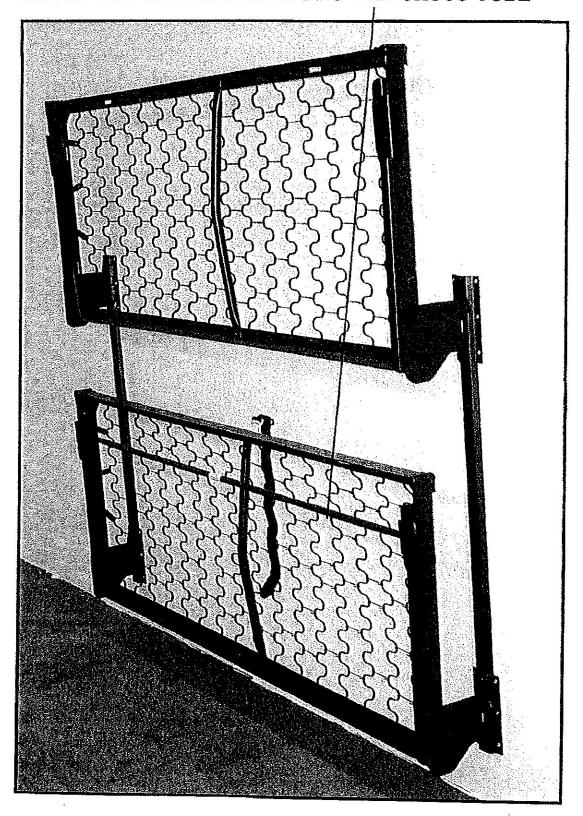


BED FRAME INSTALLATION

IT IS NECESSARY TO ASSIST THE LINKAGE WHEN LOWERING WITHOUT THE LEGS BEING ATTACHED

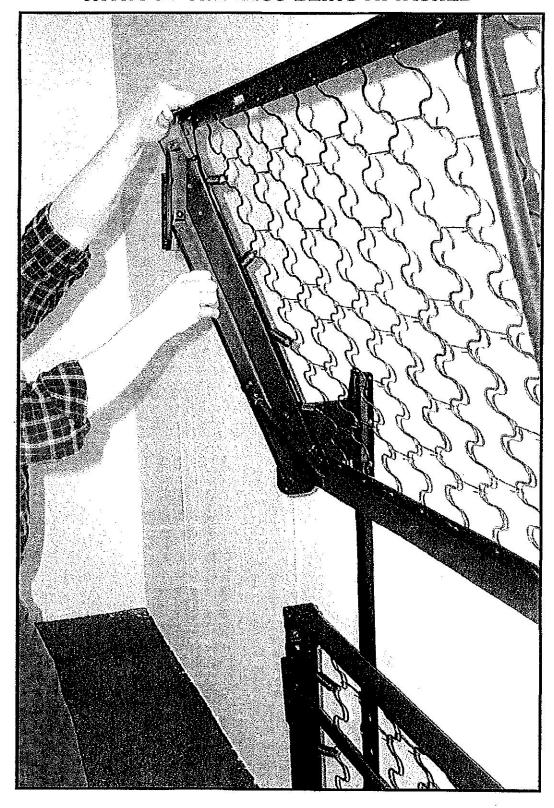


LOWERING THE TOP BUNK


NOTE: SECURE THE LEGS TO BED ANGLES BRACKET WITH THE NOTED SCREWS LEAVING THEM ONE TURN FROM BEING TIGHT. IN ORDER TO ALIGN THE LINKAGE, THE BED MUST BE FOLDED AGAINST THE WALL FOR FINAL TIGHTENING OF THE SCREWS

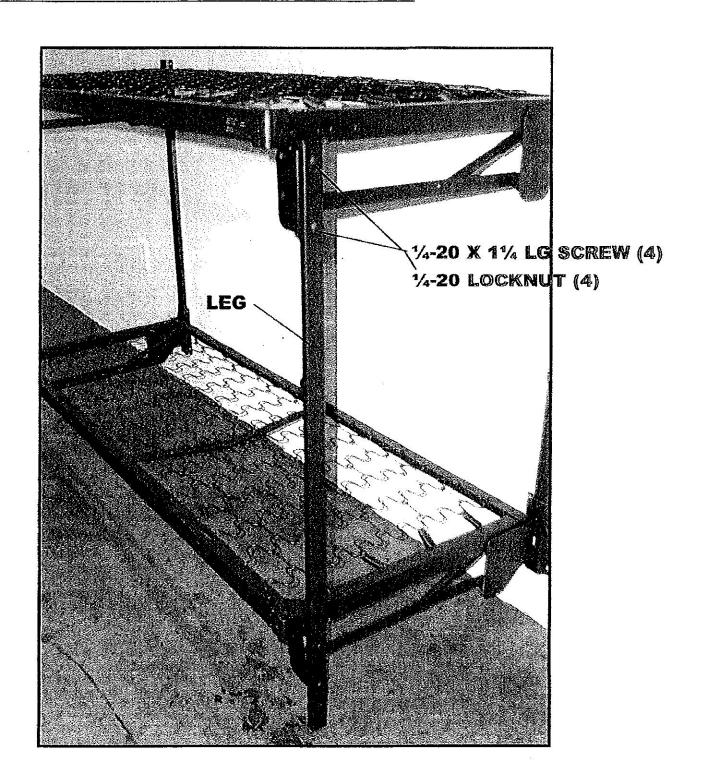

LEG ATTACHMENT

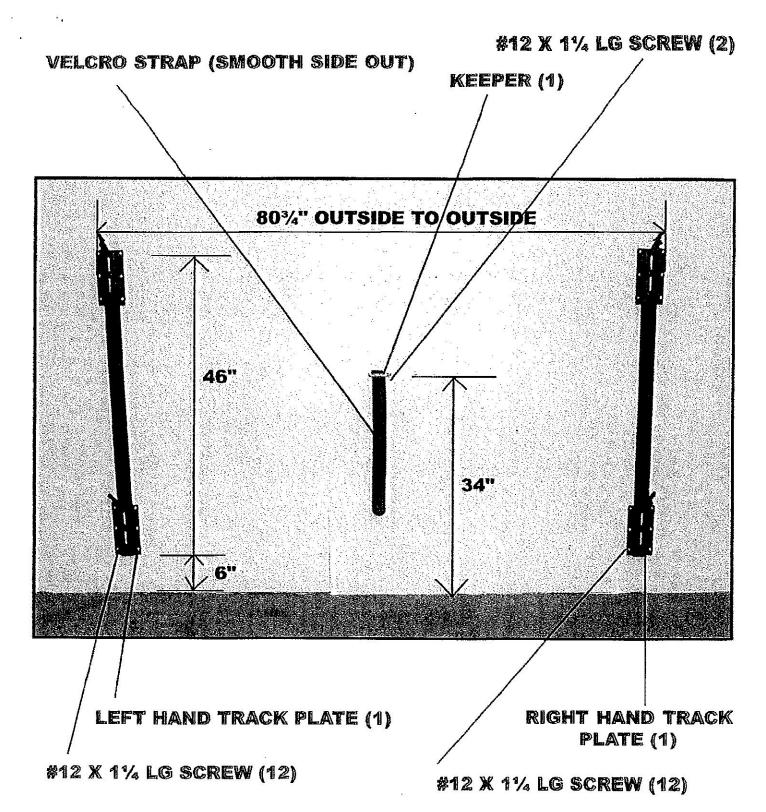

WALL ATTACHMENT DIAGRAM FOR MODEL 282876B

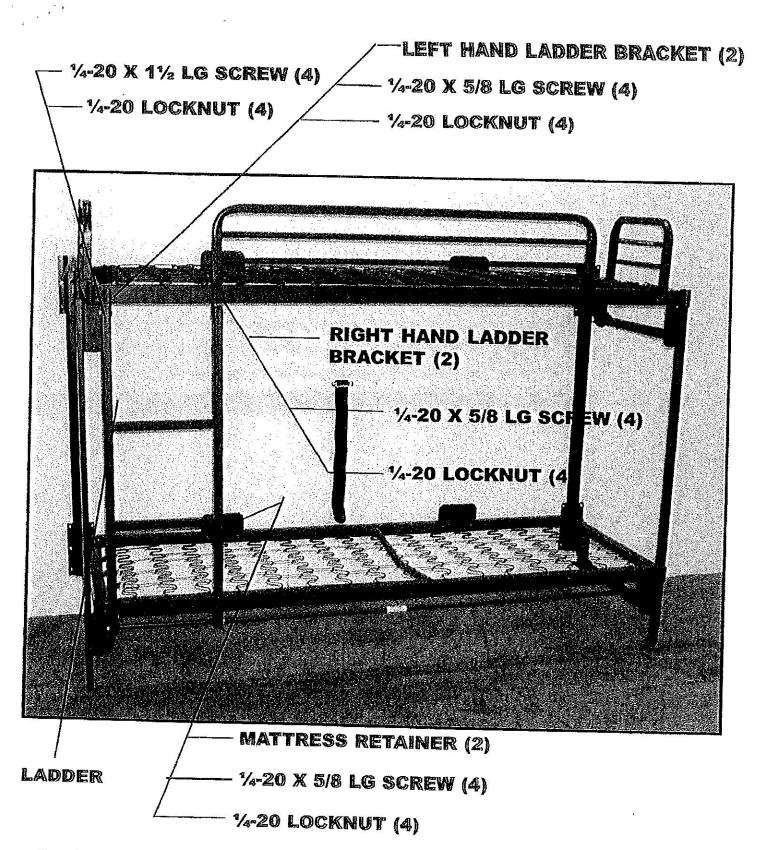

LADDER AND SAFETY RAIL ATTACHMENT